

AP1000E

Asphalt Paver

"High Production, Smooth Results"




Leading-Edge Technology

- Cat® C7.1 engine meets Tier 4 Interim/Stage IIIB emissions standards
- Advisor display, visual reference
- Self diagnostics from multiple ECMs displayed through Advisor
- Automatic engine speed control, fuel savings
- ECO-mode (1650 engine rpm) conserves fuel
- Cruise control feature, match paving train
- Screed lock, prevents screed settling
- Power Management, maintains engine speed under load

Award Winning Smoothness Features

- Independent control of each auger and each conveyor, consistent head of material
- 2 or 4 sensor mix delivery system, automatically adjusts for width changes
- Hydraulic mainframe extensions
- Reversible augers and conveyors
- 4-position adjustable push roller
- Rigid electric screeds, excellent stability

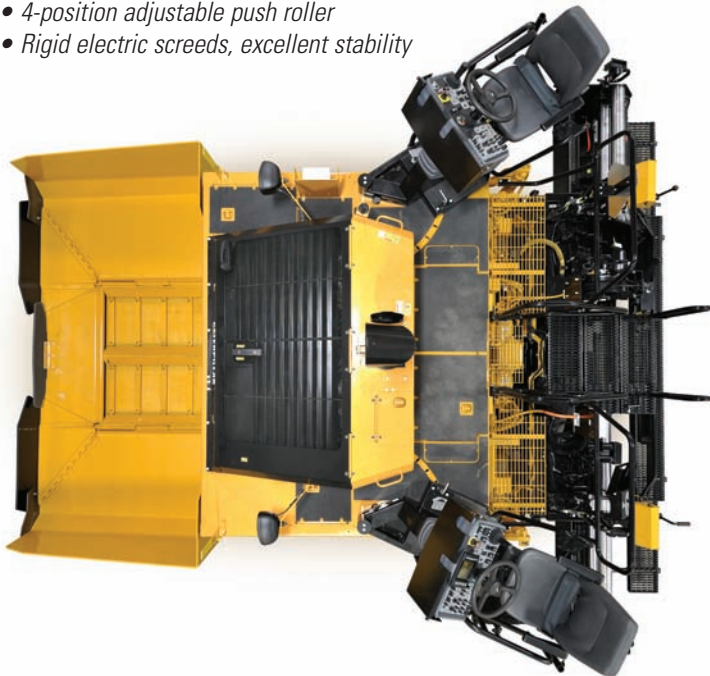

Cat® Grade and Slope Control

- True Averaging, continuously through ECM
- Factory integrated system, single source supplier
- Single or dual displays
- Single display can control one or both sides of the screed
- Text-based menus, with multiple languages
- Durable enclosure with swivel capability
- Sonic or contacting grade sensors
- Sonic averaging beam; utilizes up to 3 sonic sensors

Wheel Undercarriage

- Best in class turning radius of 0.5 m (1.5 ft)
- Travel speeds of 0-20 km/hr (0-12 mph)
- Position sensor helps maintain travel speeds when making turns by adjusting the drive speed according to the steering angle of the front wheels, limits wear produces better mat
- Front wheel assist or all-wheel drive options



Cat Grade and Slope Control

Excellent Serviceability

- Advisor display, lists service codes
- Electronic Control Modules monitor system performance and provide self diagnostics
- Manual overrides on hydraulics
- Visual indicators for routine service checks
- Long service intervals, minimize costs



Advisor Display



AP1000E Asphalt Paver Specifications

Operating Weights*

Tractor	15 160 kg	33,352 lb
w/AS2302C	18 245 kg	40,223 lb
w/AS3301C	18 427 kg	40,625 lb
w/AS3301C and C6.6 engine	18 660 kg	41,138 lb
w/AS4251C	19 508 kg	43,008 lb
w/AS4251C and C6.6 engine	19 742 kg	43,524 lb
w/AS4252C	18 561 kg	40,920 lb
w/AS452C and C6.6 engine	18 795 kg	41,436 lb

Note: C6.6 engine utilized in Tier 3/Stage IIIA markets.

Machine Dimensions (operating)

Tractor length with push roller	4.95 m	16' 3"
Overall machine length w/screed		
AS2302C (walkway deployed)	5.46 m	17' 11"
AS3301C	6.61 m	21' 7"
AS4251C	6.52 m	21' 4"
AS4252C	6.63 m	21' 8"
Tractor operating width (hopper lowered)	3.52 m	11' 7"

Transport Dimensions

Transport height (fumes stack, seat lowered)	2.85 m	9' 4"
Transport width with screed end gates (hopper raised)	3.24 m	10' 8"
Transport width w/o screed end gates (hopper raised)	3.00 m	9' 10"

Screed Paving Width

AS2302C, maximum range	3.05 m - 6.70 m	10' - 22'
AS3301C, maximum range	3.05 m - 7.38 m	10' - 24' 2"
AS4251C, AS4252C, maximum range	3.05 m - 8.00 m	10' - 26' 4"
Maximum paving depth	305 mm	12"

Optional Equipment

- All-Wheel Drive
- Auger and Mainframe Extensions
- Auxiliary Power Panel
- Cut-Off Shoe
- Decelerator Pedals
- Ecological Washdown System and Hose Reel
- Feeder Sensor (Mechanical or Sonic)
- Front Wheel Assist
- Fumes Extraction
- Grade and Slope Controls (Cat/Topcon)
- Hard Top Canopy
- Leveling Devices
- Lights (Working or Roding)
- Oscillating Push Roller
- Power Folding Front Apron
- Power Mainframe Extensions
- Product Link
- Screed Extensions
- Tow-point Indicators (Upper)
- Truck Hitch
- Umbrella
- Up-time Kit
- Warning Beacon
- Wide Width Paving Packages

Optional equipment may vary per region, contact your local Cat Dealer for more information.

The Cat® Advantage - Single Source Provider

	Cat Dealer	Competitive Dealer	Comment
Convenient worldwide dealer locations	✓		More than our 5 largest competitors combined
Engine service	✓		Cat machines feature Cat engines
Machine service	✓	✓	
Service technician trained for paving equipment	✓		Cat technicians trained on Cat machines
24/7/365 parts availability on most service parts	✓		Long lead times for competitive OEM parts
New OEM parts	✓		Competition offers inferior aftermarket parts
Reconditioned OEM parts	✓		Rebuilt to OEM spec by Cat Reman
Available financing options	✓		Available through Cat Financial
Application expertise	✓		Personnel understand the paving business
Machine rental	✓		Keeps your capital expense low
Products with high resale value	✓		Durable Cat machines built to last

QEXQ1485 (4-11)

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2011 Caterpillar
All Rights Reserved

Materials and specifications are subject to change without notice.
Featured machines in photos may include additional equipment.
See your Cat dealer for available options.

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

