



R155 SCREENER



One of the most versatile in the R Series screeners, the R155 High Energy Screener is available in several configurations including Dual Power, and is a tough, robust screening tool designed to cope with the heaviest of applications. With the ability to handle some of the worst, untreated construction and demolition waste, the R155 can minimize material pre-handling and provide clean end products.

FEATURES

- ✓ 4.880m x 1.525m (16'x5') heavy duty high energy 2 bearing screenbox
- ✓ 97 kW (127Hp) diesel engine
- ✓ Direct feed Hardox® lined hopper
- ✓ Travel out fixed walkways
- ✓ Integrated hydraulic folding stockpiling conveyors
- ✓ Fast on site setup time – 10 minutes
- ✓ Screen raises at lower end for easy bottom deck access
- ✓ Service standing room inside Powerpack
- ✓ Track mobile



The R155 has proven to be extremely effective across a wide range of applications. With a screening area of 155 ft² across the High Energy Screenbox – the largest in its class – the R155 has impressed operators across applications like site reclamation, construction and demolition waste, working with difficult materials such as heavy rock, sticky clay and fines, and boulder clay.

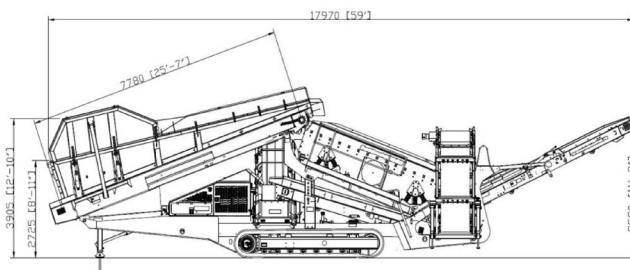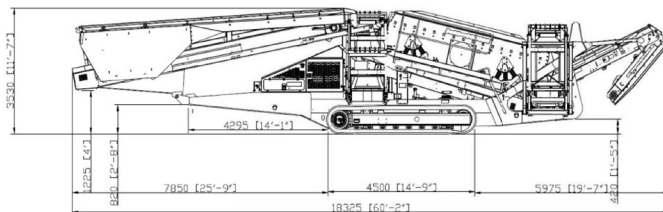

TECH SPECS

Engine

Diesel electric or
Dual Power Hybrid

130 Hp (97 kW)

Screenbox

Top Deck

4.880m x 1.525m
(16' x 5')

Bottom Deck

4.575m x 1.525m
(15' x 5')

Stockpile Height

Tail Conveyor

3.75m (12' 3")

Fines Conveyor

3.96m (13')

Mid Conveyor

3.60m (11' 10")

TRANSPORT

Transport Height

3.40m (11' 2")

Transport Length

15.3m (50' 2")

Transport Width

2.90m (9' 6")

Weight - Belt Feeder

32,700 Kgs
(72,091 lbs)

Weight - Apron Feeder

35,420 Kgs
(78,090 lbs)

OPTIONS

Heavy duty top deck finger screen | Bottom deck finger screen | Top deck punch plate | Bottom deck punch plate | Top deck Bofor screen