



The Fold 'n Go 2516KT is a mobile track screening plant that features a double deck screen for processing sand & gravel, topsoil, slag, crushed stone and recycled materials. As with all Fold 'n Go mobile screening plants, this plant provides easy to reach engine controls and central grease points for routine service. All Fold 'n Go plants provide simple-to-use hydraulic leveling gear, hydraulic plant controls and screen angle adjustment. For producers looking to increase screen efficiency, the Fold 'n Go 2516KT has the extra length to meet processing demands.

Fold 'n Go® 2516KT

SCREEN:

2516K double deck screen: 5' x 16' top and bottom deck driven by 900 RPM vibrating mechanism mounted on screen box; Adjustable amplitude with add on weights; Rubber oscillating springs; Hydraulic controls for variable angle operation. Top and bottom discharge chutes, aggregate spreader and fixed access ladder with wrap-around walkway for easy screen access. Standard material separations range from 3' to 10M depending on application.

POWER SYSTEM:

125 HP John Deere water-cooled diesel engine to power all plant functions and all on-board conveyors; 12 volt battery. NEMA-4 rated instrument panel, tachometer, and hour meter. Voltmeter, oil pressure gauge, oil temperature gauge and emergency stop.

CHASSIS:

18" channel; Hydraulic landing gear for leveling of plant; Track system with wireless remote control for easy jobsite movement.

PLANT CAPACITY:

Screening plant can process up to 500 TPH or more of feed material. Actual tonnages will vary depending on application requirements: feed material size, material separations, type of screens used, weight of product and other material considerations.

CONVEYOR SYSTEM:

Delivery Conveyor - 36' x 42" conveyor with hydraulic drive (350 FPM); Full-length skirtboards. **Side Conveyors** - Two (2) 33' x 30" swing out conveyors with hydraulic variable speed drive (0-350 FPM). **Fines Conveyor** - 26' x 48" conveyor with hydraulic drive (350 FPM); All conveyors have 220 PIW, 1/8" x 1/16" cover belting, belt cleaners and fold for transport.

FEEDER SYSTEM:

12 cubic yard heaped capacity hopper with 6' x 13' top opening; Heavy-duty 10° sloped grizzly with 6" nominal opening; Hydraulic dump; 13' x 48" belt feeder with hydraulic variable speed drive (0-60 FPM); Belting is 330 PIW, 3/16" x 1/16" cover.

SERVICE CAPACITY:

Fuel Tank120 gal
Hydraulic Tank.....130 gal


TRANSPORTATION:

Weight69,000 lbs
Height12' - 02"
Length57' - 02"
Width11' - 11"

OPTIONS:

Remote Control Grizzly - Assists in dumping oversize material off feed hopper from loader.
Wings - Assists in funneling feed material onto feed hopper grizzly.
Screen Cloth: Various types of screen media are available for multiple applications.

Fold 'n Go 2516KT

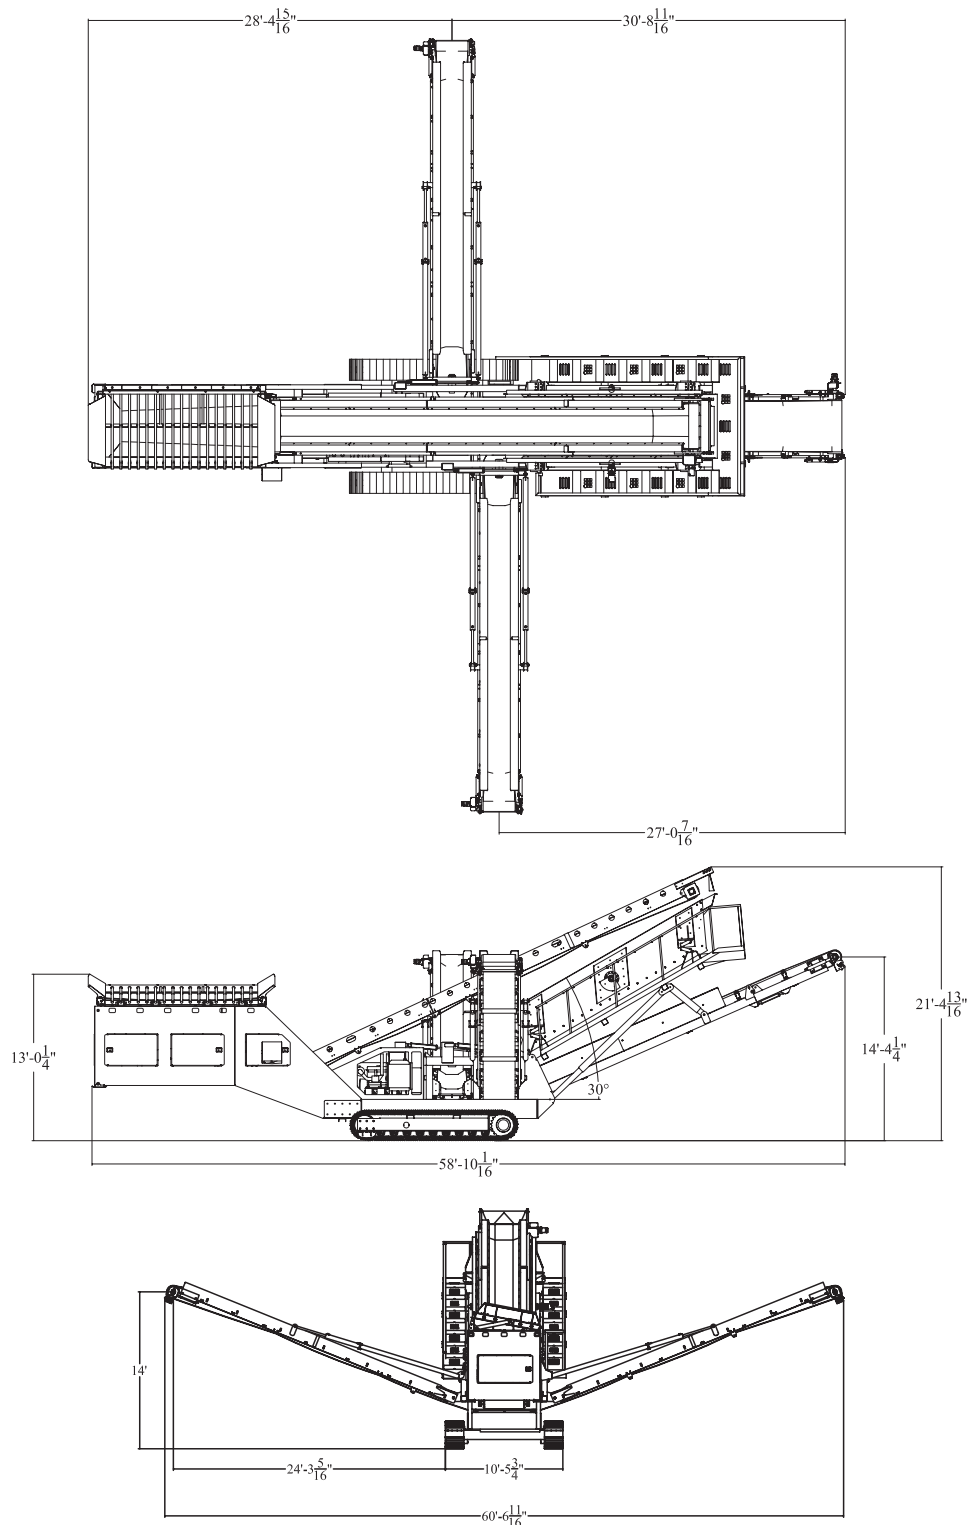

ASTEC MOBILE SCREENS an Astec Industries Company

2704 WEST LEFEVRE RD • STERLING, IL 61081 • 800.545.2125 FAX 815.626.6430 • astecmobilescreens.com

